

High-pressure
Washdown
resistant

Up to
3 meters

Customizable
software

Agri-food
Compatibility

Ajustable
emitting angles

Easy-to-use

Built-in driver



effiFLEX2-IP69K

Multimode Waterproof LED bar

PART NUMBERING

STANDARD VERSION

| EFFI-FLEX2-IP69K | - XXXX | - ZZZ | - WW | - PP |
|------------------|----------------------------|------------------------|----------------------|----------------------|
| | Optical Length [mm] | Wavelength [nm] | Window | Lens position |
| | 60 | ● 365* (UV) | TR (Transparent) | P0 (90°) |
| | 100 | ● 405 (UV) | SD (Semi-diffuse) | P1 (45°) |
| | 200 | ● 465 (Blue) | OP (Opaline) | P2 (25°) |
| | 300 | ● 525 (Green) | | P3 (10°) |
| | ... Every 100mm | ● 625 (Red) | | |
| | 2900 | ● 850 (Infrared) | | |
| | | ○ 000 (White) | | |

(*) The UV 365nm wavelength is a specific configuration. Refer to the corresponding annex.

AVAILABLE VERSIONS & OPTIONS

| OTHER VERSIONS - Compatible with each other | |
|---|--|
| Watercooling version | EFFI-FLEX2-IP69K- WTR -XXXX-ZZZ-WW-PP Allow the use of a watercooling system for thermal regulation. |
| Other LED densities versions L2 - Economical X2 - High uniformity | EFFI-FLEX2-IP69K- L2 -XXXX-ZZZ-WW-PP 1 LED every 40mm vs 1 LED every 20mm for standard (See corresponding Annex) |
| | EFFI-FLEX2-IP69K- X2 -XXXX-ZZZ-WW-PP 1 LED every 10mm vs 1 LED every 20mm for standard (See corresponding Annex) |
| OPTICAL OPTIONS | |
| Polarizer accessory | EFFI-FLEX2-IP69K-XXXX-ZZZ-WW-PP- POL (See page 5) |
| Linescan film | EFFI-FLEX2-IP69K-XXXX- ZZZ-TR-P3-LS (See page 5) |
| ELECTRONICAL OPTIONS | |
| Continuous boost (ELS XXX) | EFFI-FLEX2-IP69K-XXXX-ZZZ-WW-PP- ELSxxx (xxx = 500 / 700 / 1000) For experts who need a power boost in continuous mode. Only available in WTR version. |
| Customized software | EFFI-FLEX2-IP69K-XXXX-ZZZ-WW-PP- SWxxxxxx Specific reference xxxxxx for each customized software. |

TECHNICAL SPECIFICATIONS

effiFLEX2-IP69K

| | | | |
|--|---|---------------------------------------|------------------------|
| Illumination Mode | Overdrive, Strobe or continuous | | |
| Wavelengths | 365nm, 405nm, 465nm, 525nm, 625nm, 850nm (+/- 5nm) White (5500K ±500K) <i>(Other wavelength upon request)</i> | | |
| Power Supply | 24V DC (+/-10%) | | |
| Connector(s) <i>(See wiring layout page 6)</i> | Optical length | 60mm - 1600mm | 1700mm - 2900mm |
| | Type | FL - 4pins | 2x FL - 4pins |
| Power Consumption <i>(See details page 6)</i> | In continuous mode | Max. 10W per 100 mm of optical length | |
| | In Autostrobe mode (peak) | Max. 25W per 100mm of optical length | |
| Built-in driver version | Multimode (3 modes: AutoStrobe with overdrive intensity / Dimmable strobe / Dimmable continuous) | | |
| Analog Intensity Control (AIC) | The output optical power is adjustable from 20% to 100% by applying a signal from [2V-10VDC] Total voltage range [1.5V-24VDC] / Don't exceed 24V DC / Max. signal consumption: 4mA | | |
| Autostrobe | 450% Overdrive during 245 ms max. | | |
| | Max. duty cycle 20% | | |
| | PNP trigger input: Light ON from 4.5V* to 24V / Don't exceed 24VDC / Max. signal consumption: 4mA <i>(Option NPN for size ≥ 500mm, on PIN4: Light ON from 0V to 1V / Don't exceed 24V DC / Max. signal consumption: 4mA)</i> | | |
| Response time | Max. 10µs <i>(Rise time included)</i> | | |
| Weight | Approx. 550g + (250g per 100mm of optical length) | | |
| Dimensions | 69.5mm x 53mm x Length (= Optical length + 45mm +100mm if WTR) - <i>See the drawing on page 8</i> | | |
| Material | Device body: PMMA | | |
| Fastener | Mounting solution not included, contact Efflux | | |
| IP rating | IP69K (washdown resistant) | | |
| Operation environment | Temperature: 0°C to 40°C - Humidity: 20 to 85%RH (with no condensation) - Altitude: Up to 2000m | | |
| Storage environment | Temperature: -20° to 60°C - Humidity: 20 to 85%RH (with no condensation) | | |
| Informations | Overvoltage category I - Protective class III - Pollution degree 3 | | |
| Regulations & Marking | CE - UKCA | | |
| Environmental Standards | RoHS Directives (2011/65/EU, 2015/863/EU and China RoHS) - REACH Regulation - WEEE Regulation | | |
| Country of Origin | France | | |

***Note:** The PNP threshold voltage of 4.5V may vary according to lengths and power consumption. *(Please refer to the related table value in the User Manual of EFFI-Flex2-IP69K)*

OPTICAL SPECIFICATIONS

THREE DIFFERENT WINDOWS TO ADJUST LIGHT UNIFORMITY


Diffusers




Choose the best configuration for your use-case : More diffusion (left to right) yields greater uniformity but reduces light power.

FOUR LENS POSITIONS TO ADJUST BEAM ANGLE


With the EFFI-Flex2-IP69K, users can customize the light beam angle. The default position is P2, but alternate specifications are available upon ordering: placing the lenses closer to the window narrows the light angle.

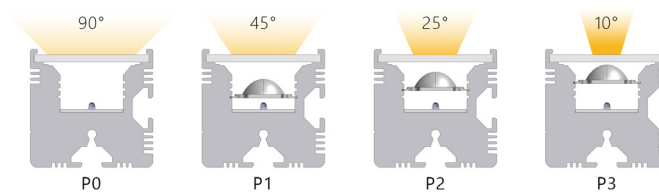


Irradiance maps

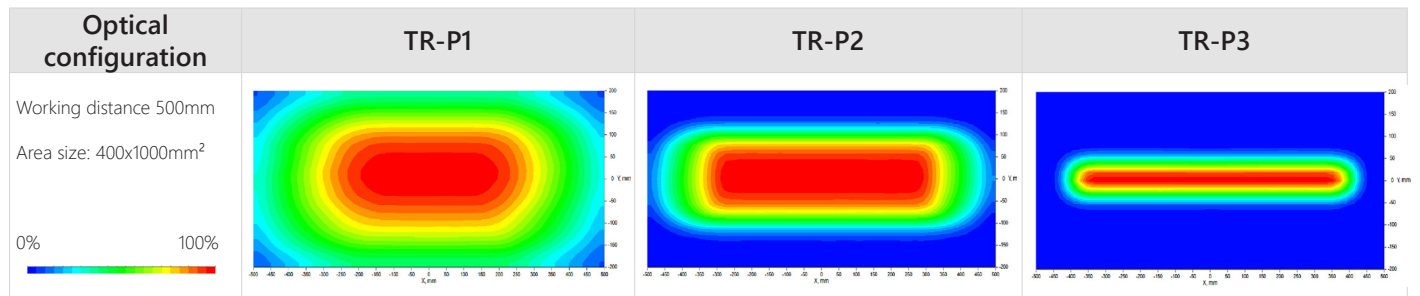


Intensity vs Working distance (WD)

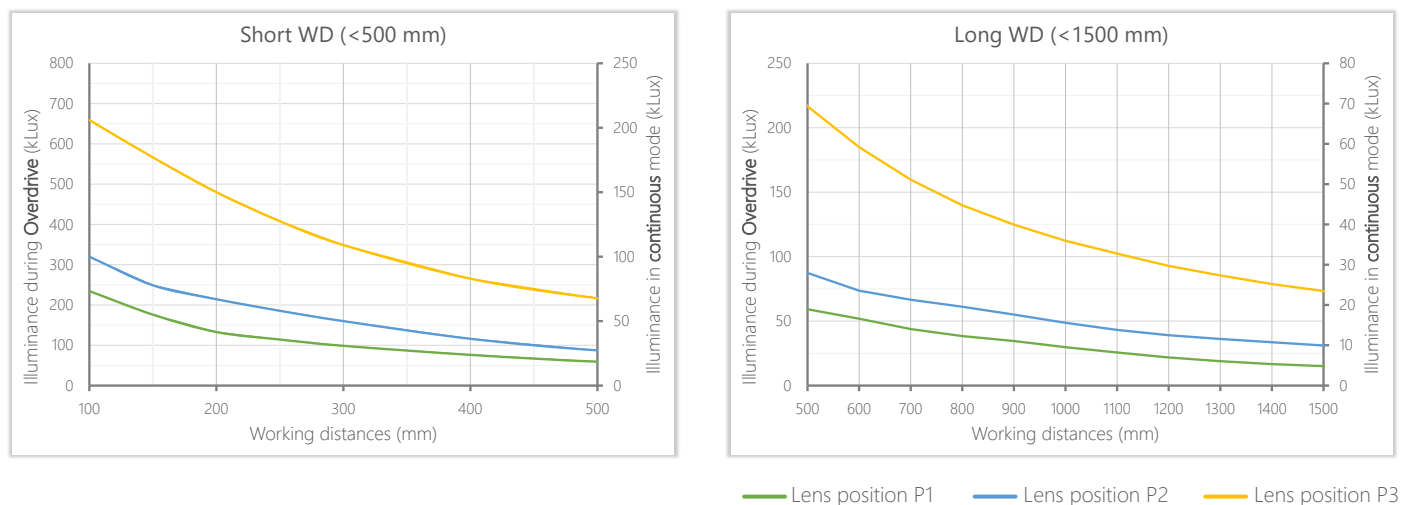

POLARIZER

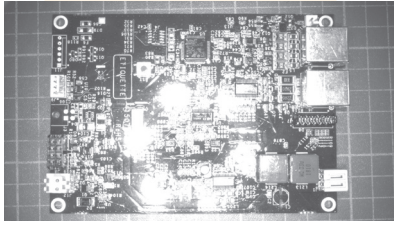

Without polarizer

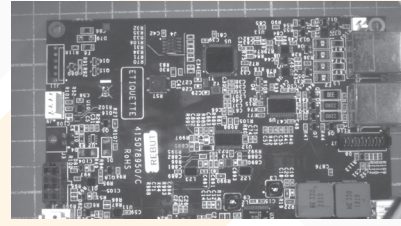

With polarizer

Using polarizers, on the Efflux light and on the camera, helps acquiring suitable images by eliminating glare issued from the workpiece .




The polarizer film is positioned just under the window on demand when ordering.


Important note: The polarization is optimal with a TR window, the use of diffuser (SD or OP) can depolarize the light.

LINESCAN CONFIGURATIONS

Linescan film (TR-P3-LS)



Without Linescan film



With Linescan film

With the lens in the upper position (P3) and the transparent window (TR), the linescan filter accessory transforms the EFFI-Flex2-IP69K into a uniform line light ideal for either brightfield or darkfield illumination.




ELECTRONICAL SPECIFICATIONS

OVERVIEW


The EFFI-Flex2-IP69K has been designed to have several electronical modes available in the same product. Additionally to that, engineers have developed a strong AutoStrobe mode to reach 450% light intensity.

Thus, EFFI-Flex2-IP69K can be used to have a:

- **High power strobe - AutoStrobe mode:** Light intensity at 450%. Max duty cycle of 20% and max pulse duration of 245ms.
- **DIM modes :** Light intensity between 20% and 100% monitored with the AIC pin and strobe or continuous mode monitored with the trigger pin.

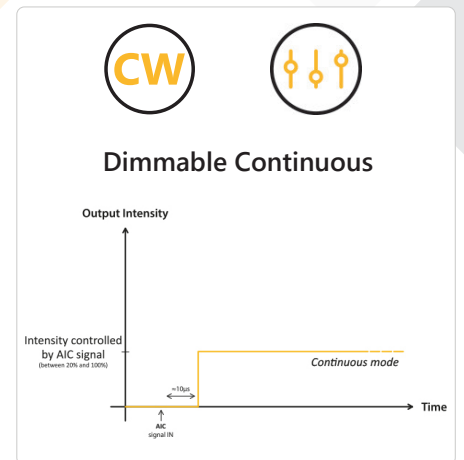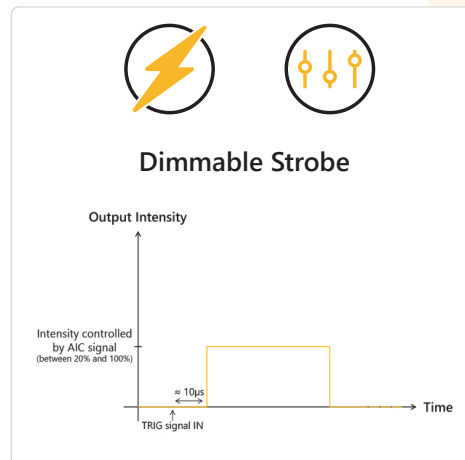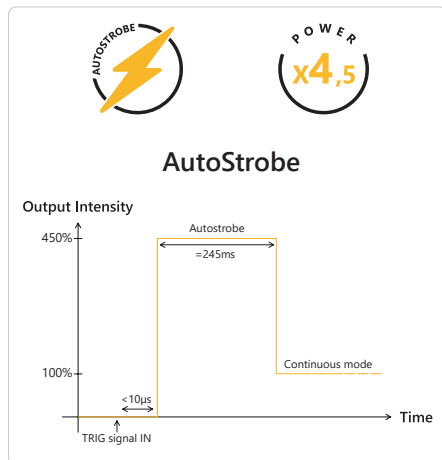

ANALOG INTENSITY CONTROL (AIC)

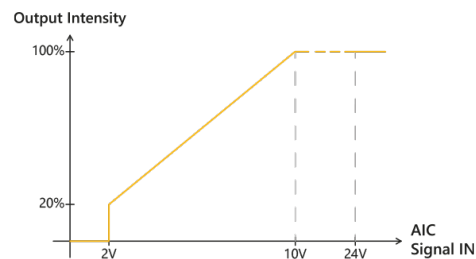

- The output intensity can be adjusted from 20% to 100% by applying a signal from [2V-10V DC].
- If $V_{AIC} = [0V-1V DC]$ or if not connected, the EFFI-Flex2-IP69K is in AutoStrobe mode by default.

POWER CONSUMPTION & CONNECTOR DEFINITION

| MAX POWER CONSUMPTION (+/- 5%) (White LED - Standard software) | | | | | | | | | | | | | | | |
|---|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Optical Length XXXX (mm) | 60 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 |
| In Continuous mode | <10W | 10W | 15W | 20W | 25W | 35W | 40W | 45W | 50W | 60W | 65W | 70W | 75W | 80W | 90W |
| In AutoStrobe mode (peak) | <20W | 20W | 40W | 65W | 85W | 110W | 135W | 160W | 185W | 210W | 235W | 260W | 285W | 305W | 335W |
| Optical Length XXXX (mm) | 1500 | 1600 | 1700 | 1800 | 1900 | 2000 | 2100 | 2200 | 2300 | 2400 | 2500 | 2600 | 2700 | 2800 | 2900 |
| In Continuous mode | 95W | 100W | 105W | 115W | 120W | 125W | 130W | 140W | 145W | 150W | 155W | 160W | 170W | 175W | 180W |
| In AutoStrobe mode (peak) | 355W | 380W | 405W | 430W | 455W | 480W | 505W | 525W | 555W | 575W | 605W | 625W | 650W | 675W | 700W |


FL - 4 pins 2FL - 4 pins

Note: These values are maximum values. The consumption may vary according to the wavelength and the software.

WIRING LAYOUT

Depending on the size, the light comes with one or two flying leads cables (refer to the table above).

Flying leads FL (10m cable)

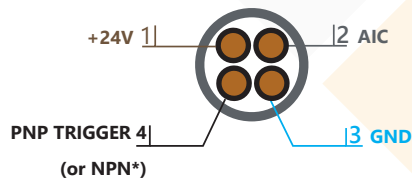

Notes:

- The EFFI-FLEX2-IP69K requires 24V DC input power.
- PNP trigger pin (or NPN) needs to be connected either to a trigger signal for AutoStrobe and Strobe mode or to a continuous signal for Continuous mode.
- AIC pin can stay unplugged for Autostrobe mode, or tied to +24V for continuous mode at maximum intensity.
- (*) The NPN configuration is an option for which the PNP trigger input is replaced by the NPN trigger input.
- For the 2FL configurations, is located on the valve side and should only have +24V and GND connected. Both cable GND must be tied together.

LAYOUT EXAMPLE (PNP)


| | AutoStrobe | Dimmable Strobe | Dimmable Continuous |
|-----|------------|-----------------|---------------------|
| FL | | | |
| 2FL | | | |
| | | | |

CONTINUOUS POWER BOOST (ONLY WITH WTR VERSION)


With the ELS500, ELS700 and ELS1000 options the EFFI-FLEX2-IP69K light power can be improved for continuous use. These configurations only work with the WTR version as extra heat is produced. As this is an expert configuration, get in touch with Efflux before implementing it.

MECHANICAL SPECIFICATIONS


DIMENSIONS OF EFFI-FLEX2-IP69K - FL (in mm)

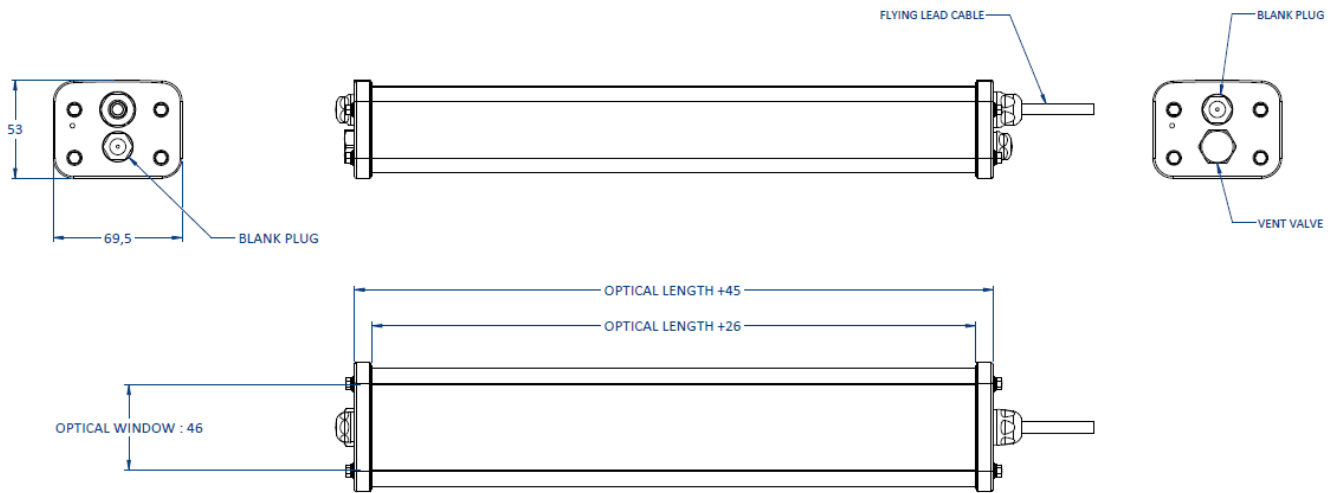


DIMENSIONS OF EFFI-FLEX2-IP69K - 2FL (in mm)

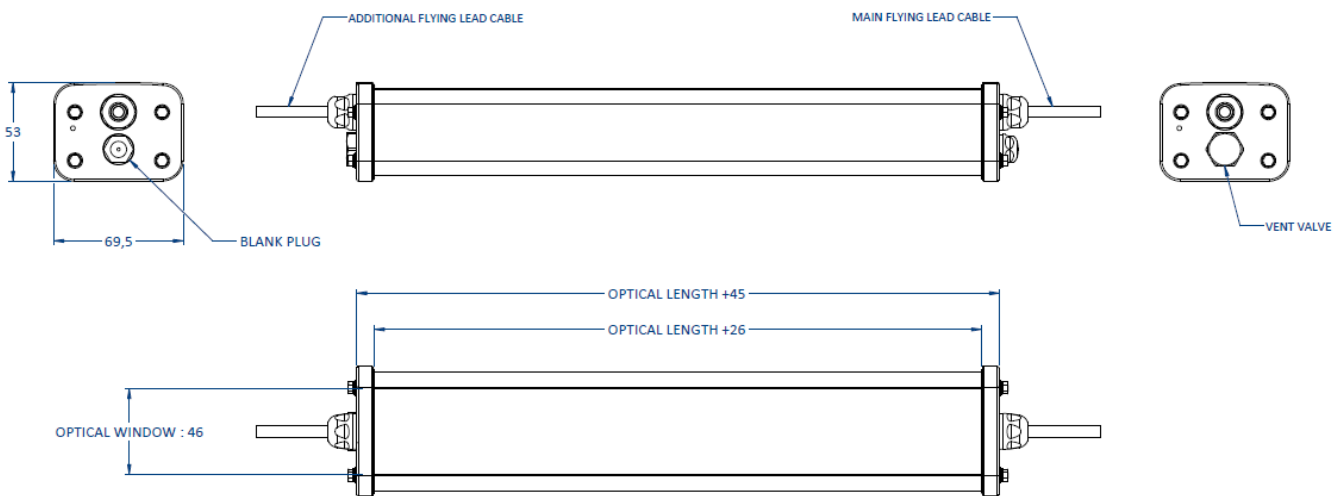

DIMENSIONS OF EFFI-FLEX2-IP69K-WTR - FL (in mm)

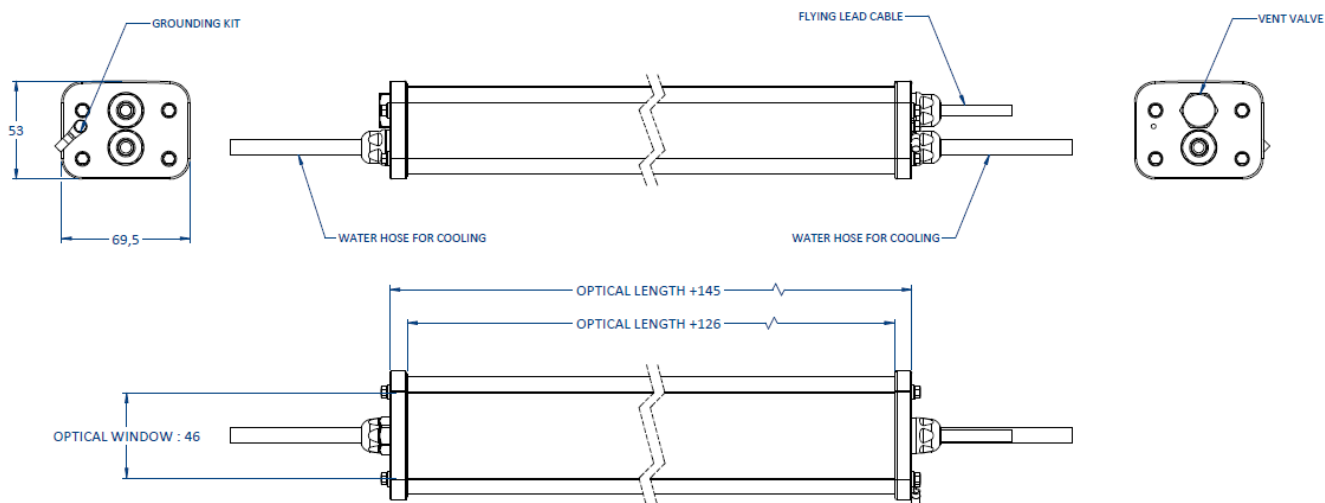

DIMENSIONS OF EFFI-FLEX2-IP69K-WTR - 2FL (in mm)

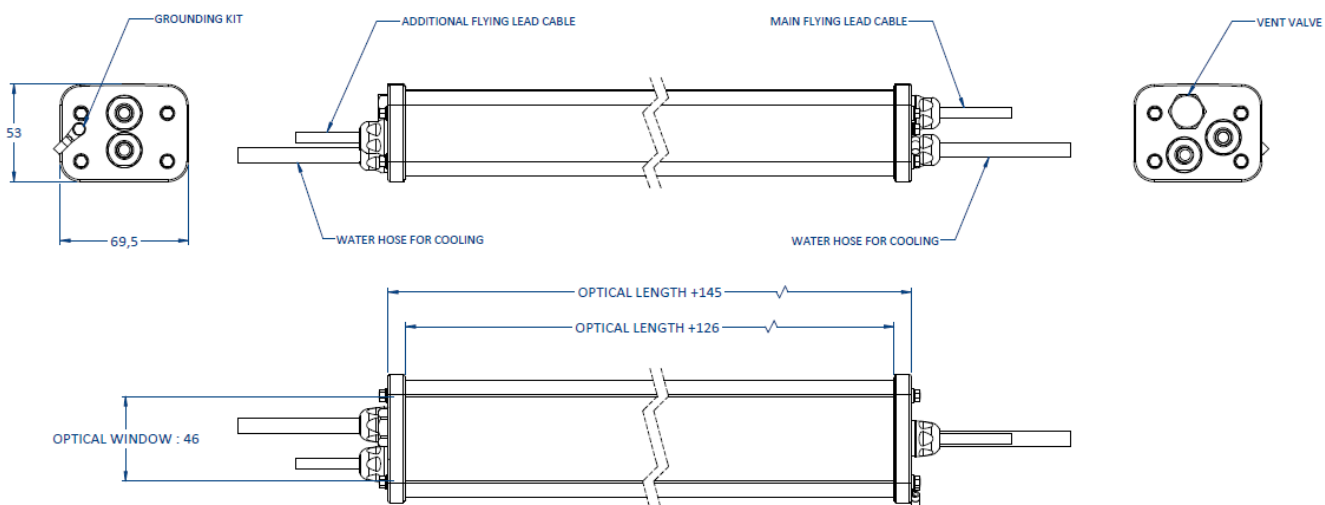

ACCESSORIES


Please refer to the specific documentation for additional information on the accessories of the EFFI-Flex2-IP69K.



EFFO-FLR-...

OTHER CUSTOMIZATION

Please ask your sales contact for a custom device.

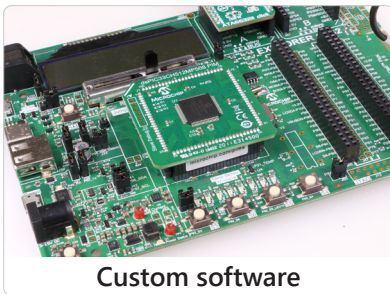

CONTACT INFORMATION

Please refer to the specific documentation (datasheet, user manual and drawing) for complementary information. Contents of this document are based on information available as of October-2024 and may be changed without prior notice.



EFFILUX
1, Rue de Terre Neuve
Mini Parc du Verger - Bâtiment E
91940 Les Ulis - FRANCE

Tel: +33 9 72 38 17 80
Fax: +33 9 72 11 21 69
Mail: sales@effilux.fr

Copyright 2022 Effilux - All rights Reserved

effiFLEX2-IP69K UV365

Multimode Waterproof UV LED bar light

PART-NUMBERING

| EFFI-FLEX2-IP69K - XXXX | - ZZZ | - WW | - PP |
|--------------------------------|-----------------|-------------|---------------|
| Optical Length [mm] | Wavelength [nm] | Window | Lens position |
| 60 | ● 365 (UV) | TR | P0 (90°) |
| 100 | | | |
| ... All 100mm | | | |
| 2900 | | | |




Notes:

- The EFFI-Flex2-IP69K UV365 comes with one possible configuration lens position at P0 (90°) (i.e. no lenses)
- The PMMA window is directly compatible with UV light.
- Linescan film and standard polarizer are not compatible with UV365.
- The flying lead for the UV configuration is limited at 5m to ensure equal overdrive performances as in standard configuration.

AVAILABLE VERSIONS AND OPTIONS


| OPTICS | |
|------------------------|--|
| Pure UV option | EFFI-FLEX2-IP69K-XXXX-365-TR-P0- PUV <i>(See details next page)</i> |
| L2: Economical version | EFFI-FLEX2-IP69K- L2 -XXXX-365-TR-P0 1 LED every 40mm vs 1 LED every 20mm for standard (See corresponding Annex) |

ELECTRONICAL MODES

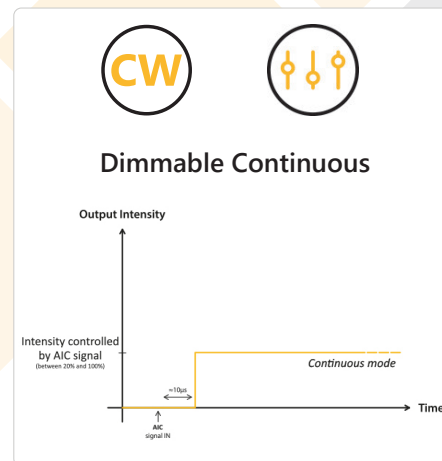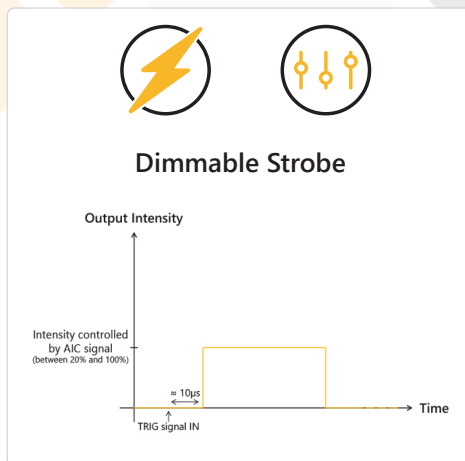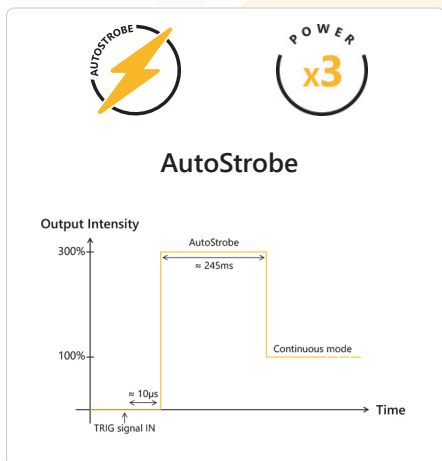

Note: Compared to the standard version the autostrobe overdrive mode has been capped at 300% of the continuous level.

PURE UV OPTION



Used with the EFFI-Flex2-IP69K UV 365, the Pure UV technology is an innovative system that drastically improves the fluorescence effect while concurrently removing glare and improving contrast.

Note: The Pure UV light must be used along with a UV Cut filter on the camera.

ANNEX 2 - OTHER LED DENSITIES

The standard LED density for the EFFI-Flex2-IP69k is one LED every 20mm. However, we propose two other LED densities:

- L2 - Economical version : We put one LED every two slots (every 40mm).
- X2 - High light uniformity : We put one LED in between each standard LED (every 10mm).

Those modifications change the power consumptions and the light uniformity. For these references refer to the datas below.

POWER CONSUMPTION & CONNECTOR DEFINITION

L2 version

| MAX POWER CONSUMPTION (+/- 5%) (White LED - Standard software) | | | | | | | | | | | | | | |
|---|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|
| Optical Length XXXX (mm) | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 | 1800 | 2000 | 2200 | 2400 | 2600 | 2800 |
| In Continuous mode | 10W | 15W | 20W | 25W | 35W | 40W | 45W | 50W | 60W | 65W | 70W | 75W | 80W | 90W |
| In AutoStrobe mode (peak) | 20W | 40W | 65W | 85W | 115W | 135W | 160W | 185W | 210W | 235W | 260W | 285W | 305W | 330W |

| | |
|-------------|--------------|
| FL - 4 pins | 2FL - 4 pins |
|-------------|--------------|

X2 version (Same as standard)

| MAX POWER CONSUMPTION (+/- 5%) (White LED - Standard software) | | | | | | | | | | | | | | | |
|---|------|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|
| Optical Length XXXX (mm) | 60 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 |
| In Continuous mode | <10W | 10W | 15W | 20W | 25W | 35W | 40W | 45W | 50W | 60W | 65W | 70W | 75W | 80W | 90W |
| In AutoStrobe mode (peak) | <20W | 20W | 40W | 65W | 85W | 110W | 135W | 160W | 185W | 210W | 235W | 260W | 285W | 305W | 335W |

| Optical Length XXXX (mm) | 1500 | 1600 | 1700 | 1800 | 1900 | 2000 | 2100 | 2200 | 2300 | 2400 | 2500 | 2600 | 2700 | 2800 | 2900 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| In Continuous mode | 95W | 100W | 105W | 115W | 120W | 125W | 130W | 140W | 145W | 150W | 155W | 160W | 170W | 175W | 180W |
| In AutoStrobe mode (peak) | 355W | 380W | 405W | 430W | 455W | 480W | 505W | 525W | 555W | 575W | 605W | 625W | 650W | 675W | 700W |

| | |
|-------------|--------------|
| FL - 4 pins | 2FL - 4 pins |
|-------------|--------------|

Note: These values are maximum values. The consumption may vary according to the wavelength and the software.