


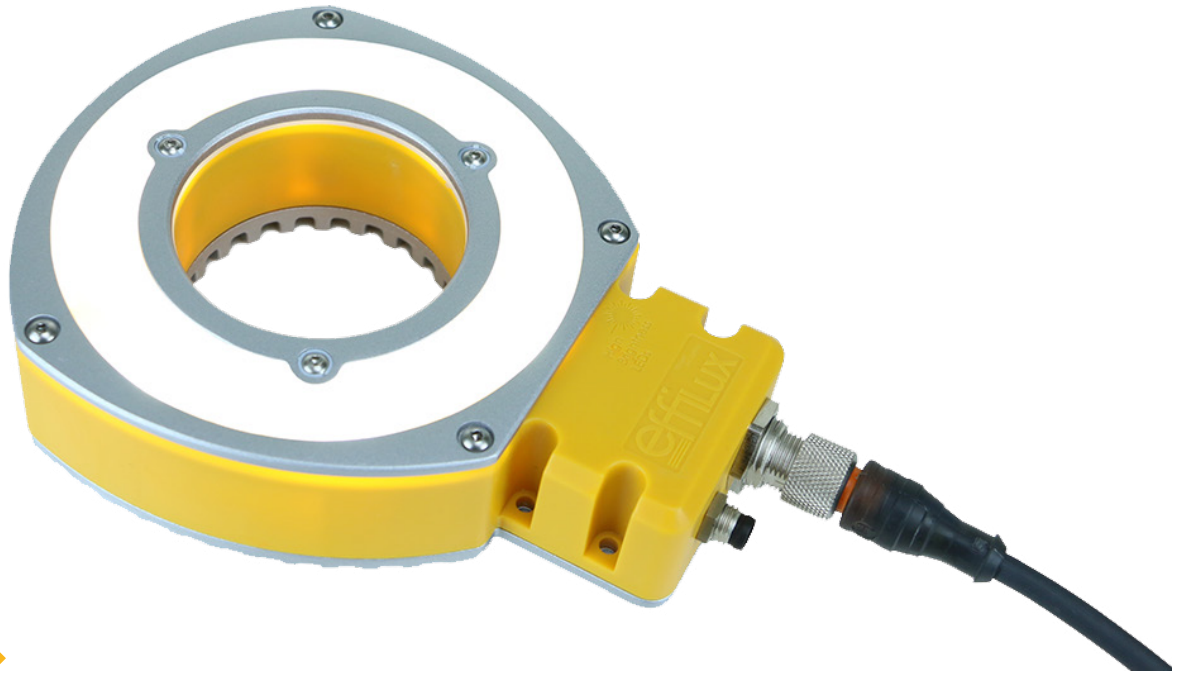

Uniform

Built-in driver

**Adjustable
beam angle**

Compatible



effiRING

Adjustable Beam Power Ring Light


INTRODUCTION

TABLE OF CONTENTS


PART NUMBERING.....	PAGE 3
GENERAL SPECIFICATIONS.....	PAGE 4
OPTICAL SPECIFICATIONS.....	PAGE 5
ELECTRONICAL SPECIFICATIONS.....	PAGE 6
MECHANICAL SPECIFICATIONS.....	PAGE 8
CONTACT INFORMATION.....	PAGE 10

APPLICATIONS

Quality control

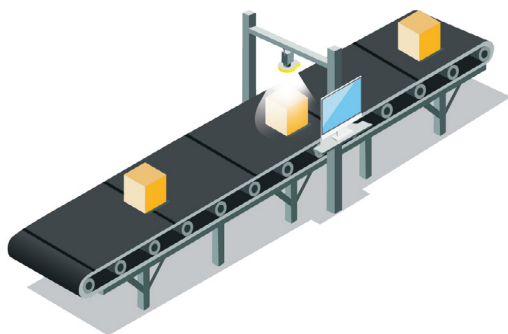

Pick and Place

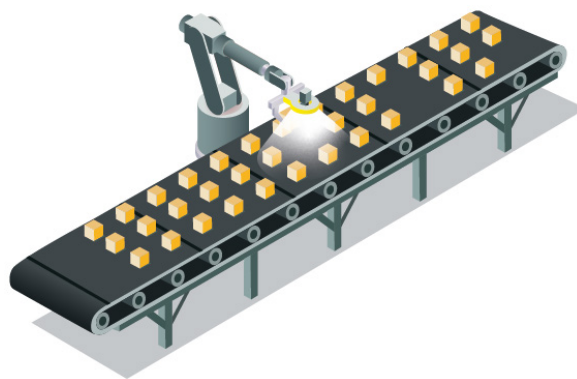

RELATED PRODUCT

Refer to the datasheets of the products below for more details on those related products.

EFFI-SRING



Compact & flexible
segmented ring light

PART NUMBERING

STANDARD VERSION

EFFI-RING	- ZZZ	- WW	- PP
	Wavelength [nm]	Windows	Lens position/ Emitting angle
●	365* (UV)	TR: Transparent	P0
●	405 (UV)	SD: Semi-Diffuse	P1
●	465 (Blue)	OP: Opaline	P2
●	525 (Green)		P3
●	625 (Red)		
●	850 (Infrared)		
○	000 (White 5500K)		
●	SWIR*		

Notes:

- (*) SWIR wavelengths 980, 1050, 1150, 1200, 1300, 1450, 1550, 1650nm are also available in custom configurations
- For the UV wavelength 365: no lens (not compatible) and a PMMA glass treated for UV.

AVAILABLE OPTIONS & VERSIONS

STR option

EFFI-RING - ZZZ - WW - PP - STR

- The direct current option gives a full control over the current sent in the LEDs. It allows strobing and more light power.
- Warning: There is no LED protection

Polarizer option

EFFI-RING - ZZZ - WW - PP - POL

- The optical accessory Polarizer eliminates glare caused by the lighting on parts to control.
- The camera can then analyze the part, without being disturbed by the glow effects.

Multispectral configuration

EFFI-RING - ZZZ - WW - PP - RGB or WUI

- If RGB (red, green, blue): add -RGB at the part numbering .
- If WUI (white, UV, IR): add -WUI at the part numbering.
- With the EFFI-RING light, the 3-way potentiometer accessory will only allow to switch ON/OFF each color independently, not to adjust the intensity.


GENERAL SPECIFICATIONS



Illumination Mode	Continuous or strobe	
Wavelengths	365nm, 405nm, 465nm, 525nm, 625nm, 850nm, White (5500K ±500K), SWIR (custom)	
Power Supply	24V DC	Direct current
Connector(s)	M12 - 5 pins	M8 - 4 pins
Power Consumption	72W	Depends on your configuration
Weight	400 g	
Dimensions	117mm x 151mm x 40mm	
Clear aperture	58 mm	
Material	Device body: Aluminum alloy & ABS	
Fastener	M4 screws	
IP rating	IP65 (except with polarizer accessory: IP50) For extended use with water, use a plastic cap on the unused connector (M8 or M12)	
Operation environment	Temperature: 0°C to 40°C - Humidity: 20 to 85%RH (with no condensation) - Altitude: Up to 2000m	
Storage environment	Temperature: -20° to 60°C - Humidity: 20 to 85%RH (with no condensation)	
Informations	Overvoltage category I - Protective class III - Pollution degree 3	
Regulations & Marking	CE - UKCA	
Environmental Standards	RoHS Directives (2011/65/EU, 2015/863/EU and China RoHS) - REACH Regulation - WEEE Regulation	
Country of Origin	France	


OPTICAL SPECIFICATIONS

LENS POSITION

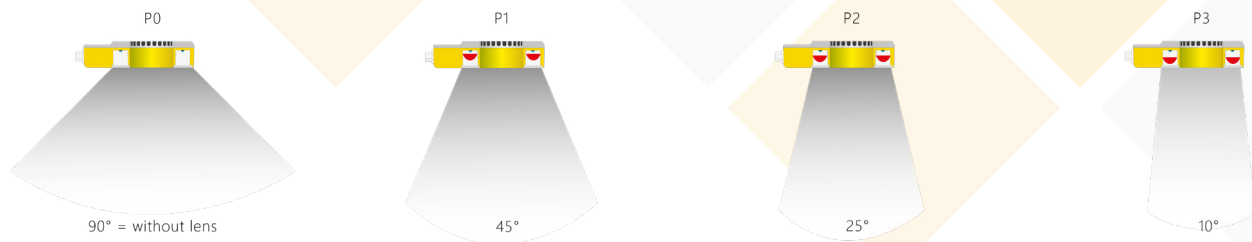


Illumination vs working distance :


Transparent

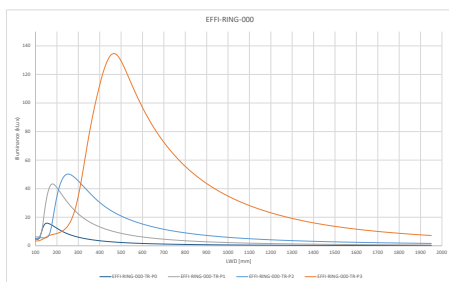

Semi-diffuse

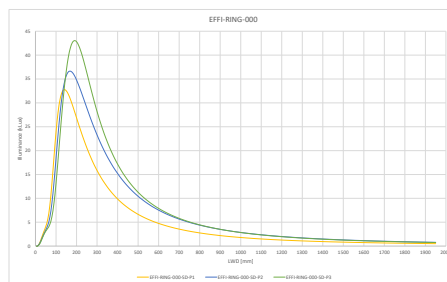


Opaline

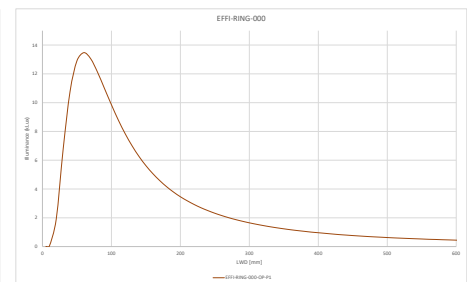


Ø Spot vs working distance :


Transparent

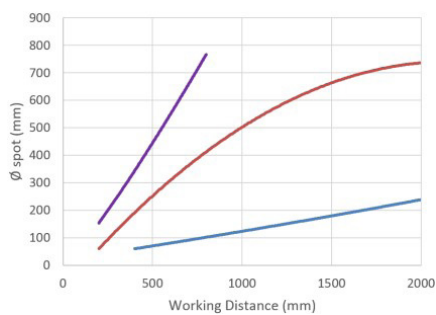

Semi-diffuse

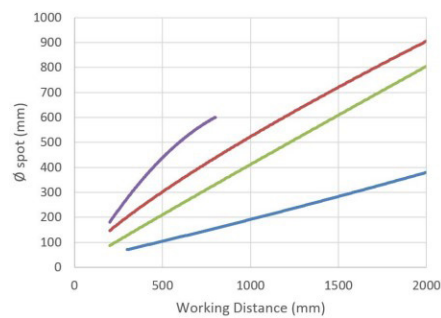


Opaline

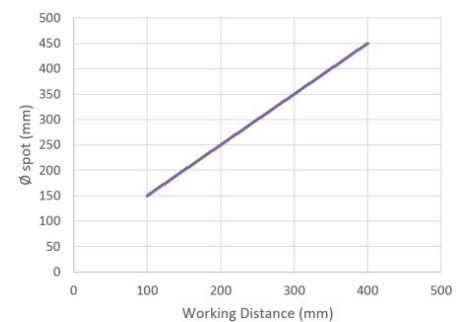

— P0
 — P1
 — P2
 — P3

ELECTRONICAL SPECIFICATIONS


WORKING MODE

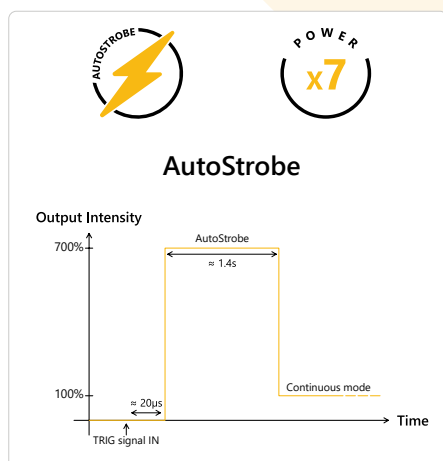


WIRING LAYOUT

M12 male connector - Smart control (Strobe)

Designation Monochrome version

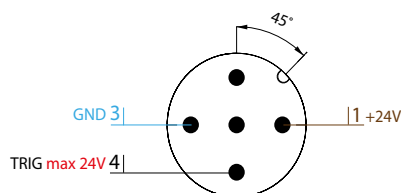


RGB or WUI

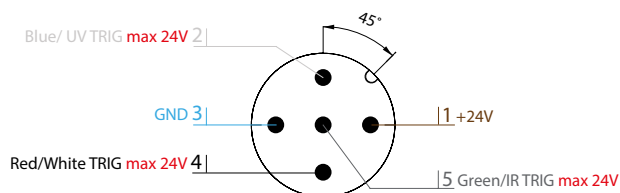


M8 male connector - direct LED control (expert mode)

Designation Monochrome version

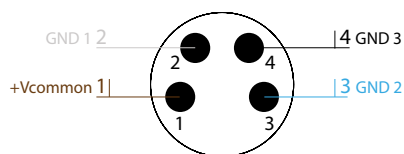

RGB or WUI

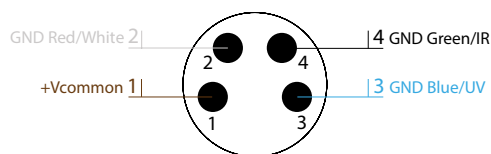


M8 STR configuration

Do not exceed the maximum current for a given frequency and a given T_{pulse} indicated in the table below.

	F (Hz)				
T pulse (μs)	1	5	10	15	20
100 000	1.0 A				
50 000	1.2 A				
10 000	1.5 A		1.0 A		
1 000	2.0 A				
100	2.0 A				

CHARACTERISTICS OF THE PULSE

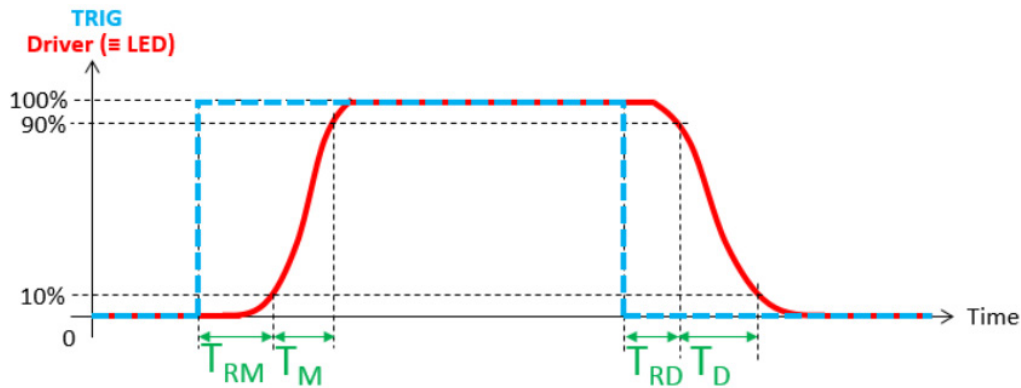

Designation	Time (μs)
Response rise time (T_{RM}) ¹	10*
Rise time (T_M) ²	10
Response fall time (T_{RD}) ⁴	5*
Fall Time (T_D) ³	10

Notes:


- (1) From the beginning of the TRIG signal to 10% of the max intensity.
- (2) From the 10% to 90% of the maximum intensity.
- (3) From the end of the TRIG signal to 90% intensity.
- (4) From 90% to 10% of the maximum intensity.

T_M increases when UTRIG or/and the frequency increases.

(*) **Note:** For the STR option, there is no response time value to consider.


MECHANICAL SPECIFICATIONS (DIMENSIONS IN MM)

Weight	400 g
Dimensions	117mm x 151mm x 40mm
Clear aperture	58 mm
Material	Device body: Aluminum alloy & ABS
Fastener	M4 screws
IP rating	IP65 (except with polarizer accessory: IP50) For extended use with water, use a plastic cap on the unused connector (M8 or M12)

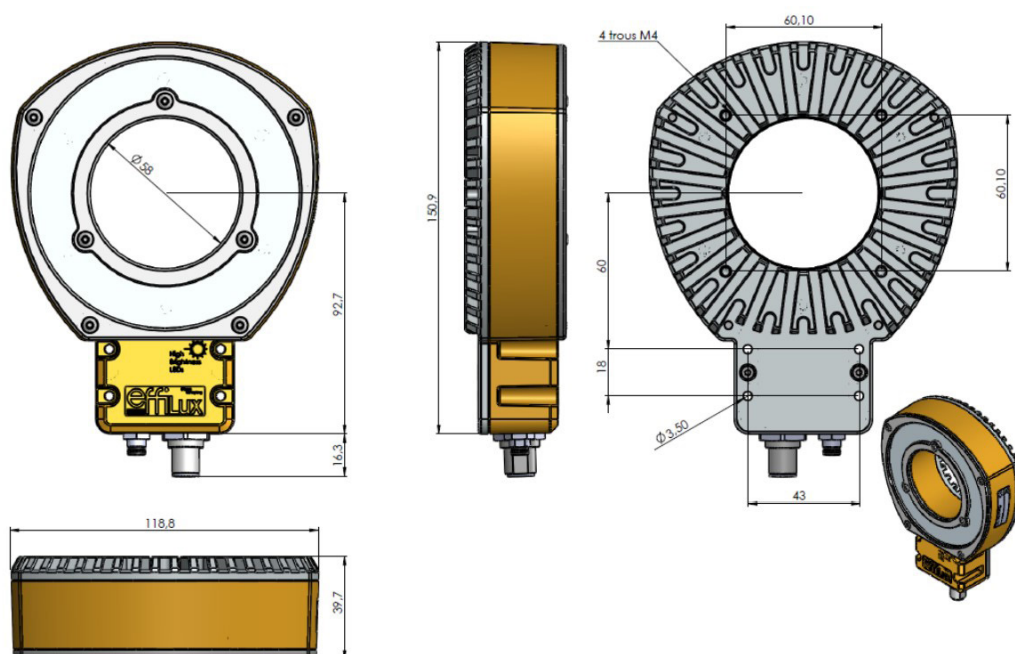


Combinations between camera supports

EFFM-1-HORI : EFFM-1-0024 + EFFM-1-0025

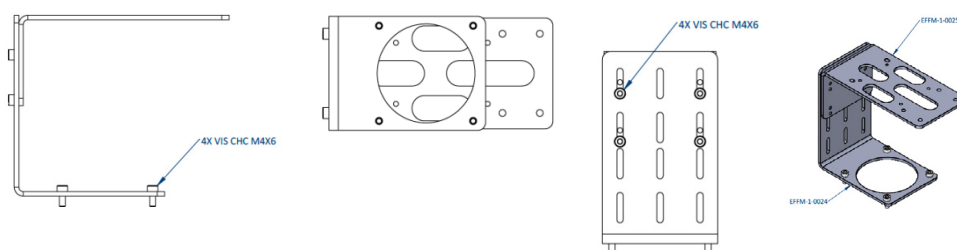


EFFM-1-VERT : EFFM-1-0024 + EFFM-1-0026

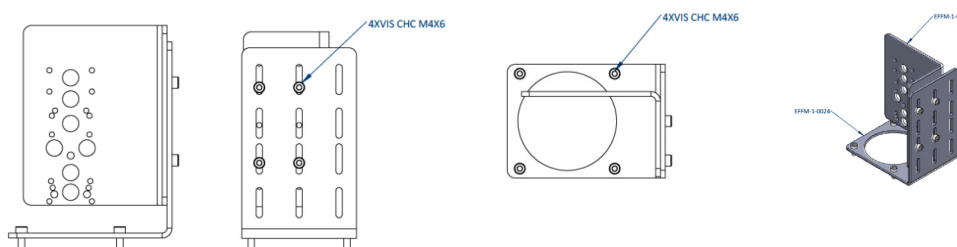


M8 CONNECTOR

LED	Forward Voltage U_{LED} (V)
UV	3.50 - 4.30
Blue	2.80 - 3.50
Green	2.90 - 3.70
Red	1.90 - 2.70
IR	1.50 - 2.00
White	3.10 - 3.70

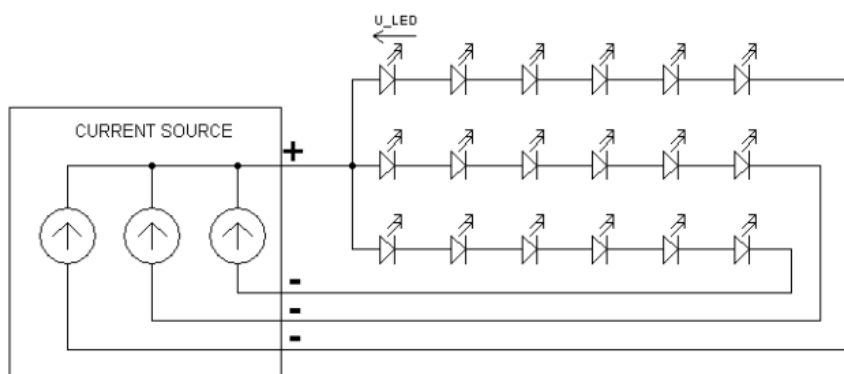

M12 CONNECTOR

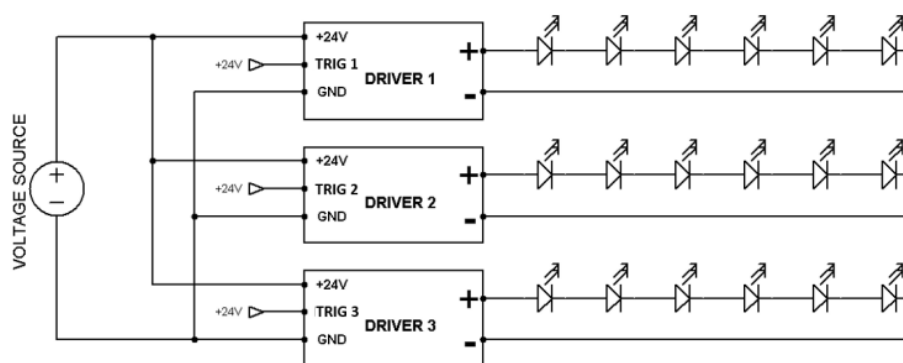

Notes: TRIG 1,2 and 3 are connected together inside the product for Monochrome version

ACCESSORIES

Please refer to the specific documentation for additional information on the accessories of the EFFI-RING.



Camera mounting

EFFM-1-HORI-STEEL
EFFM-1-HORI-STEEL-V2
EFFM-1-VERT-STEEL
EFFM-1-VERT-STEEL-V2



Camera Filters

EFFO-FLR-...



Extension cables

M12
2meters: EFFC-CAB-M12-FM-5-DD-L2
5meters: EFFC-CAB-M12-FM-5-DD-L5
10meters: EFFC-CAB-M12-FM-5-DD-L10
M8
2meters: EFFC-CAB-M8-F-3-D-L2
5meters: EFFC-CAB-M8-F-3-D-L5
10meters: EFFC-CAB-M8-F-3-D-L10



Pulse controller

Pulse controller
EFFI-IPSC4
Cables
2 meters: EFFC-CAB-M8-SUBD-FM-4-DD-L2
5 meters: EFFC-CAB-M8-SUBD-FM-4-DD-L5
10 meters: EFFC-CAB-M8-SUBD-FM-4-DD-L10

CONTACT INFORMATION

Please refer to the specific documentation (datasheet, user manual and drawing) for complementary information. Contents of this document are based on information available as of January 2025 and may be changed without prior notice.



EFFILUX
1, Rue de Terre Neuve
Mini Parc du Verger - Bâtiment E
91940 Les Ulis - FRANCE

Tel: +33 9 72 38 17 80
Fax: +33 9 72 11 21 69
Mail: sales@effilux.fr

Copyright 2022 Effilux - All rights Reserved