





THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE PROPERTY OF EFFILUX AND CONFIDENTIAL. THEY SHALL NOT BE REPRODUCED NOR DISCLOSED TO ANY PERSON EXCEPT TO THOSE HAVING A NEED TO KNOW THEM WITHOUT PRIOR WRITTEN CONSENT OF EFFILUX

CE DOCUMENT ET LES INFORMATIONS QU'IL CONTIENT SONT CONFIDENTIELS ET SONT LA PROPRIÉTÉ EXCLUSIVE DE EFFILUX. ILS NE DOIVENT ÊTRE COMMUNIQUÉS QU'ÀUX PERSONNES AYANT A EN CONNAÎTRE ET NE PEUVENT ÊTRE REPRODUITS NI DIVULGUÉS À TOUTE AUTRE PERSONNE SANS AUTORISATION PRÉALABLE ÉCRITE PAR EFFILUX

EFFI-LASE :

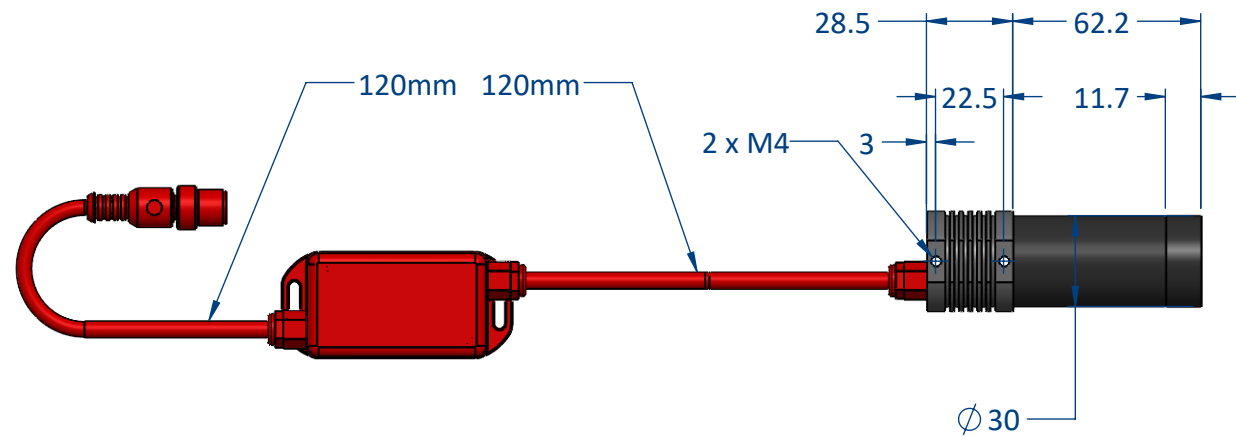

EFFI-LASE-POWER :

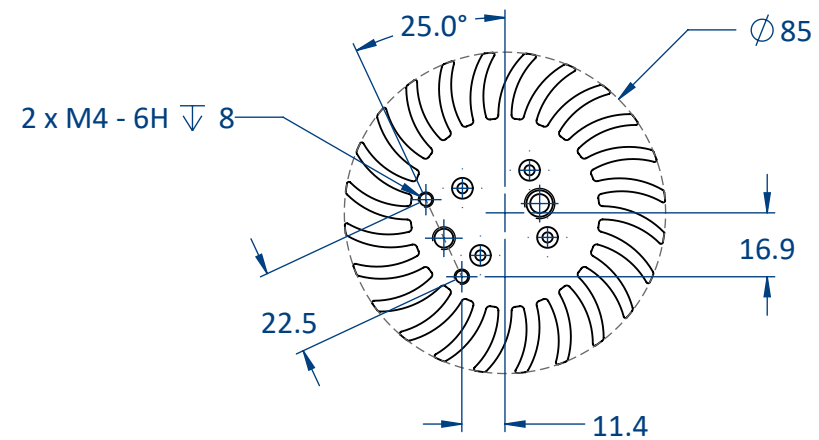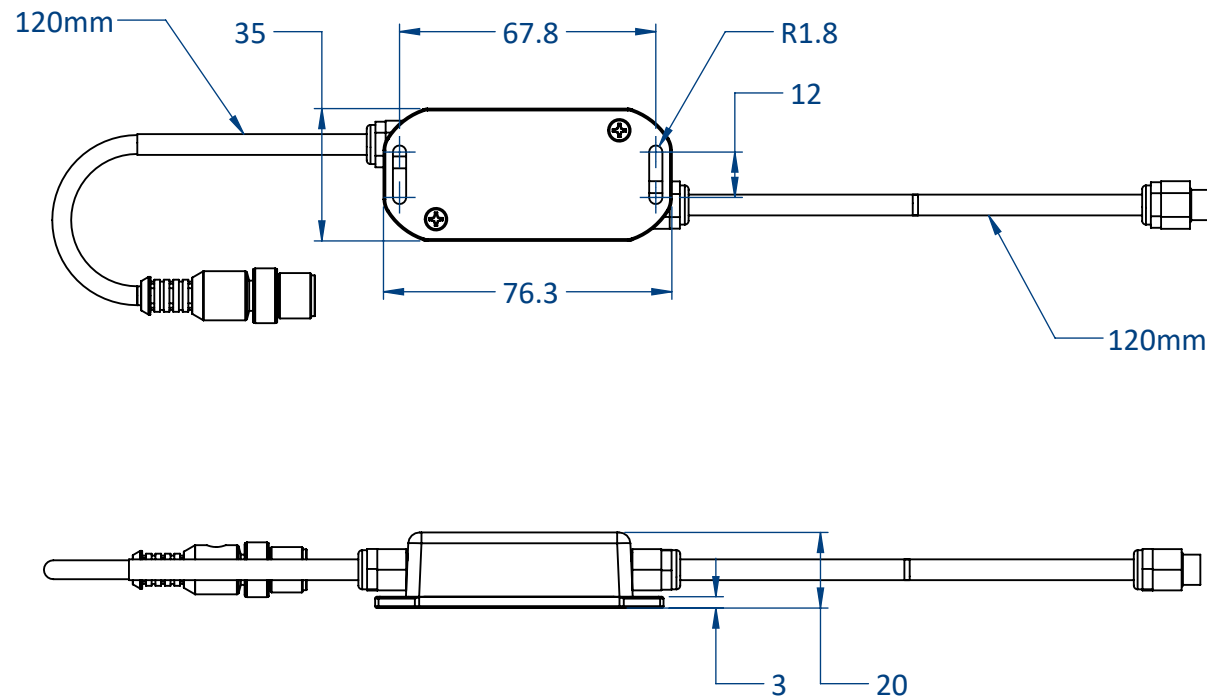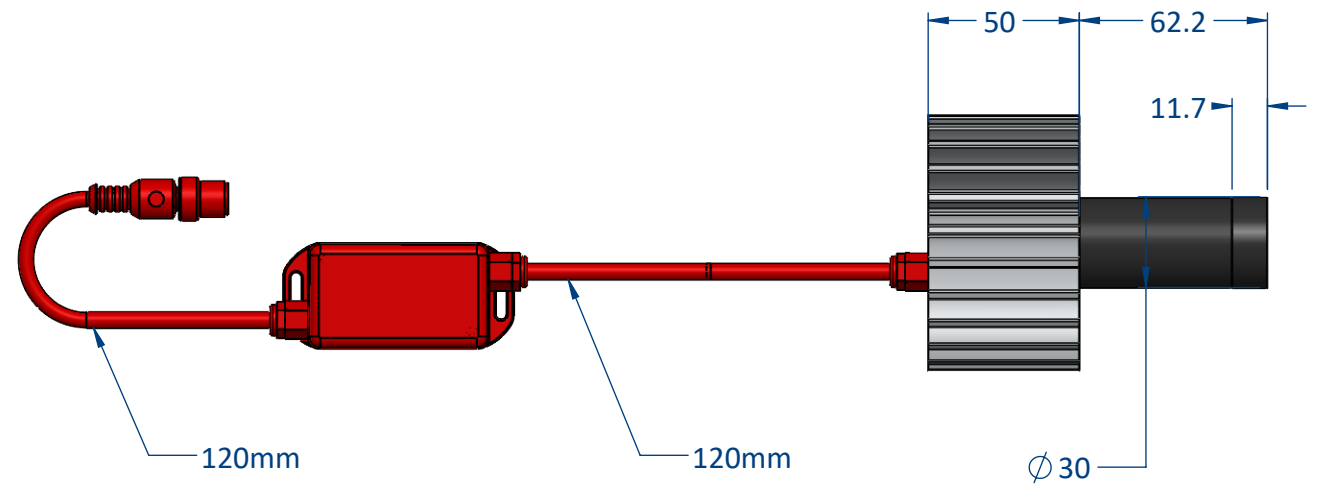

PLEASE REFER TO THE SPECIFIC DOCUMENTATION FOR WIRING LAYOUT

DES/ DRA.		24/10/2024
APPROVED		24/10/2024

Reference EFFI-LASE-CM-ZZZ-MMM EFFI-LASE-PWR-CM-ZZZ-MMM		IP 5X	1 Rue de Terre Neuve Mini Parc du Verger Bâtiment E 91940 Les Ulis, France
Designation EFFI-LASE EFFI-LASE POWER			Mail: sales@effilux.fr Tel : +33 9 72 52 70 03 www.effilux.com
Rev /	Size A3	Page 1/1	Unit : mm General Tolerances X ≤ 300 TOL ±0,2 300 < X < 800 TOL ±0,5 X ≥ 800 TOL ± 1
			effilux Efficient Led Lighting

**Red components correspond to the M12 configuration (with LED driver).
For the M8 configuration (without LED driver) don't take this into account**